



INDIA'S NO. 1 MOTORCYCLE Splendor+

Bharosa Aisa, Family Jaisa.

Hero Splendor+ has a history of trust and reliability built over the last 3 decades. Equipped with a state-of-the-art i3S technology and xSens programmed FI technology, it has been the trusted companion of millions in their journey toward progress. This unmatched trust, combined with 1st in-segment features is carried forward in the advanced Splendor+ XTEC















i3S TECHNOLOGY



5 YEAR WARRANTY



BETTER RESALE VALUE



BETTER MILEAGE



LOW MAINTENANCE COST



SUPERIOR RIDE COMFORT



LED HIGH-INTENSITY POSITION LAMP

The LED High Intensity Position Lamp stylishly enhances the looks





3D 'HERO' LOGO —

Style is enhanced with modern 3D Hero logo on fuel tank




∤ Hero





The segment defining full digital speedometer raises the style and tech benchmarks



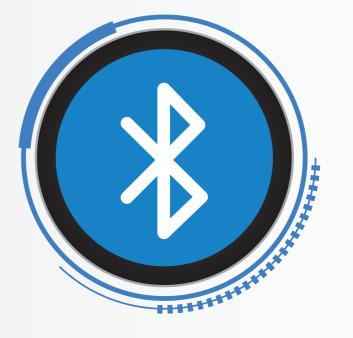

BLUETOOTH WITH CALL, SMS ALERT (1ST IN SEGMENT**)

Stay connected with the world while on the go! Connect your phone with Splendor+ XTEC to get instant call, SMS alerts







Achieve maximum fuel efficiency with the real time mileage indicator





XTEC TECHNOLOGY A STATEMENT OF THE STAT

MOBILE USB CHARGER

Get the convenience of charging your phone on the go with mobile USB charger





Experience seamless pick-up and performance with the intelligent sensor-based xSens FI technology that boosts power and fuel efficiency





= i3S TECHNOLOGY ===

Increases mileage by cutting off engine when idle and decreases emissions by minimizing fuel wastage



XTEC TECHNOLOGY

A STATEMENT OF THE STAT





SAFETY SAFETY

SIDE STAND INDICATOR & ENGINE CUT-OFF

Ensures safety of rider by indicating the position of side stand.

Moreover, Splendor+ XTEC won't move unless side stand is up

(shuts the engine if side stand is down)





BANK ANGLE SENSOR

Ensures safety of rider by cutting-off the engine at fall.





AND CONVENIENCE

COMFORTABLE LONG SEAT —

Long seat gives extra comfort under all road / load conditions



SPECIFICATIONS

Engine	
Туре	Air Cooled, 4-stroke, Single Cylinder, OHC
Displacement	97.2 cc
Max. Power	5.9 kW @ 8000 rpm
Max. Torque	8.05 N-m @ 6000 rpm
Bore x Stroke	50.0 x 49.5 mm
Fuel System	Programmed Fuel Injection
Transmission & Chassis	
Clutch	Multiplate Wet Type
Transmission	4-speed Constant Mesh
Frame Type	Tubular Double Cradle
Suspension	
Front	Telescopic Hydraulic Shock Absorbers
Rear	Swingarm with 5-step Adjustable Hydraulic Shock Absorbers
Brakes	
Front	Drum (130 mm)
Rear	Drum (130 mm), Integrated Braking System
Wheels & Tyres	
Front	80/100-18 M/C 47P (Tubeless)
Rear	80/100-18 M/C 54P (Tubeless)
Electricals	
Starting Type	Electric Start
Battery	MF-battery 12V-3 Ah
Head Lamp	12V 35 / 35W Halogen Bulb MFR
Tail/Stop Lamp	12V -5 / 10W - MFR
Turn Signal Lamp	12V 10W x 4 - MFR
Dimensions	
Length	2000 mm
Width	720 mm
Height	1052 mm
Saddle Height	785 mm
Wheelbase	1236 mm
Ground Clearance	165 mm
Fuel Tank Capacity	9.8 Litre

*Accessories shown may not be a part of standard fitment.

CHOOSE YOUR SPLENDOR+



























Splendor+





Regd. Office: Hero MotoCorp Limited, The Grand Plaza, Plot No.2, Nelson Mandela Road, Vasant Kunj - Phase -II, New Delhi - 110070, India. CIN: L35911DL1984PLC017354. Phone No.: 011 - 46044100. For further information, contact nearest Hero MotoCorp authorised outlet or call our toll free no.: 1800 - 266 - 0018 or visit us on www.heromotocorp.com. Accessories and features shown may not be part of standard fitment. Always wear a helmet while riding a two wheeler.



